



Vegetable Slicer TRS Vegetable Slicer - Variable Speed

ITEM # _____
MODEL # _____
NAME # _____
SIS # _____
AIA # _____



600424 (DTRSYVV)

Vegetable slicer, variable speed 140 to 750 rpm, 500 W. Lever operated hopper in stainless steel for intense use

Short Form Specification

Item No. _____

Universal vegetable slicer for more than 80 different types of cuts, thanks to several stainless steel dw safe discs.

Parts in contact with food - stainless steel lever, stainless steel hopper and cutting chamber - can be removed without tools and placed in a dishwasher for fast cleaning.

Compact and ergonomic design, user-friendly lever (better pressure control, with less effort for arms and shoulder), designed for right and left handed users.

Angled base (20°) facilitates loading and unloading operations. Long vegetable hopper (55,5mm diameter), integrated in the wide 3/4 moon round hopper (215cm²) in stainless steel. Asynchronous industrial motor for heavy duty and longer life. High discharge zone (up to 20cm) for GN containers. Variable speed (140 to 750 rpm) and pulse control for precise slicing. Automatic start/stop function will stop the machine when the lever hopper is lifted and will restart automatically when lowered. Waterproof (IP55) control panel and aluminium alloy motor base completely closed for complete protection against strong jets of water.

APPROVAL: _____

Main Features

- Suitable for 100-400 meals for table service and up to 800 meals for catering service.
- Vegetable slicer with slicing, grating, shredding (julienne) as well as dicing and French fries cutting capability.
- Ergonomically designed for right and left-handed users, frontal working and to reduce working space around the machine.
- All parts in contact with food are removable without the use of tools, stainless steel hopper, stainless steel lever and cutting chamber are dishwasher safe.
- Hopper easily removed for cleaning.
- Base inclined at 20° to provide easy loading and unloading.
- High discharge zone permits the use of deep GN containers (up to 20cm).
- Complete and wide selection of blades and grids available (diam. 205 mm).
- Pulse function for precise cutting.
- Magnetic safety system and motor brake. Prevents machine from running when lever swings away or is open.
- Automatic restart of the machine with the 3/4 moon shaped pusher in position.
- Continuous feed model.
- Delivered with:
 - All stainless steel vegetable prep attachment with a lever-integrated long vegetable hopper (55,5mm diameter) and a large round hopper (215cm²)

Construction

- All blades (available on request) are made in stainless steel and dishwasher safe.
- Variable speed (140 to 750 rpm).
- Compact and portable design.
- Asynchronous silent industrial motor for heavy duty and longer life.
- Feeding arm and hopper are made entirely in stainless steel. Aluminium motor housing.
- Power: 500 Watts.
- Improved ventilation system to manage smoothly heavy duty use.
- Reinforced basement and feet to withstand the continuous movements of the unit.
- Improved fixing of long vegetable hopper pusher.

Included Accessories

- 1 of Ejector disc PNC 653772

Optional Accessories

- Stainless steel shredding disc with S-blades 4x4 mm PNC 650077 ☐
- Stainless steel shredding disc with S-blades 6x6 mm (can also be used for French fries) PNC 650078 ☐



Vegetable Slicer TRS Vegetable Slicer - Variable Speed

• Stainless steel shredding disc with S-blades 8x8 mm (can also be used for French fries)	PNC 650079	☐	• Aluminum pressing/slicing disc with straight blades 8 mm - for dicing	PNC 650116	☐
• Stainless steel shredding disc with S-blades 10x10 mm (can also be used for French fries)	PNC 650080	☐	• Stainless steel shredding disc with S-blades 2x8 mm	PNC 650158	☐
• Stainless steel pressing/slicing disc with S-blades 0,6 mm (can be used for slicing or combined with grids)	PNC 650081	☐	• Stainless steel shredding disc with S-blades 2x10 mm	PNC 650159	☐
• Stainless steel pressing/slicing disc with S-blades 1 mm (can be used for slicing or combined with grids)	PNC 650082	☐	• Stainless steel pressing/slicing disc with S-blades 10 mm (can be used for slicing or combined with grids)	PNC 650160	☐
• Stainless steel pressing/slicing disc with S-blades 2 mm (can be used for slicing or combined with grids)	PNC 650083	☐	• Stainless steel pressing/slicing disc with S-blades 12 mm (can be used for slicing or combined with grids)	PNC 650161	☐
• Stainless steel pressing/slicing disc with S-blades 3 mm (can be used for slicing or combined with grids)	PNC 650084	☐	• Stainless steel pressing/slicing disc with corrugated S-blades 8 mm (can be used for slicing or combined with grids)	PNC 650162	☐
• Stainless steel pressing/slicing disc with S-blades 4 mm (can be used for slicing or combined with grids)	PNC 650085	☐	• Stainless steel pressing/slicing disc with corrugated S-blades 10 mm (can be used for slicing or combined with grids)	PNC 650164	☐
• Stainless steel pressing/slicing disc with S-blades 5 mm (can be used for slicing or combined with grids)	PNC 650086	☐	• Stainless steel pressing/slicing disc with S-blades 13 mm (can be used for slicing or combined with grids)	PNC 650165	☐
• Stainless steel pressing/slicing disc with S-blades 6 mm (can be used for slicing or combined with grids)	PNC 650087	☐	• Stainless steel shredding disc with S-blades 2x2 mm	PNC 650166	☐
• Stainless steel pressing/slicing disc with S-blades 8 mm (can be used for slicing or combined with grids)	PNC 650088	☐	• Stainless steel shredding disc with S-blades 3x3 mm	PNC 650167	☐
• Stainless steel pressing/slicing disc with corrugated S-blades 2 mm (can be used for slicing or combined with grids)	PNC 650089	☐	• Set of 4 stainless steel discs (2mm and 5mm slicing pressing discs, 2mm and 7mm grating discs)	PNC 650178	☐
• Stainless steel pressing/slicing disc with corrugated S-blades 3 mm (can be used for slicing or combined with grids)	PNC 650090	☐	• Stainless steel work table with folding shelves and disk rack for TRK, TRS and TR210 table top models	PNC 653283	☐
• Stainless steel pressing/slicing disc with corrugated S-blades 6 mm (can be used for slicing or combined with grids)	PNC 650091	☐	• Dicing grid 5x5 mm	PNC 653566	☐
• Bistrot Pack-set stainless steel discs (2mm and 5mm slicing pressing disc, 2mm grating disc)	PNC 650092	☐	• Dicing grid 8x8 mm	PNC 653567	☐
• Set of 3 stainless steel discs for Pizza (2mm and 4mm pressing/slicing discs with S-blades, 7mm grating disc)	PNC 650107	☐	• Dicing grid 10x10 mm	PNC 653568	☐
• Cleaning tool for TRS, TRK & TR210 5-8-10 mm dicing grids	PNC 650110	☐	• Dicing grid 12x12 mm	PNC 653569	☐
• Dicing set 10x10x10mm (10mm aluminum slicing pressing disc with 205mm diam. and 10mm grid)	PNC 650112	☐	• Dicing grid 20x20 mm	PNC 653570	☐
• Aluminum pressing/slicing disc with straight blades 10 mm - for dicing	PNC 650115	☐	• Grid for chips 6x6 mm	PNC 653571	☐
			• Grid for chips 8x8 mm	PNC 653572	☐
			• Grid for chips 10x10 mm	PNC 653573	☐
			• Support for 1 disc, diam. 175mm and 205mm	PNC 653632	☐
			• Ejector disc	PNC 653772	☐
			• Stainless steel grating disc 2 mm	PNC 653773	☐
			• Stainless steel grating disc 3 mm	PNC 653774	☐
			• Stainless steel grating disc 4 mm	PNC 653775	☐
			• Stainless steel grating disc 7 mm	PNC 653776	☐
			• Stainless steel grating disc 9 mm	PNC 653777	☐
			• Stainless steel grating disc for knoedeln and bread	PNC 653778	☐
			• Stainless steel grating disc for parmesan and bread	PNC 653779	☐



Vegetable Slicer
TRS Vegetable Slicer - Variable Speed


The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.

2024.03.19




Vegetable Slicer TRS Vegetable Slicer - Variable Speed

Front

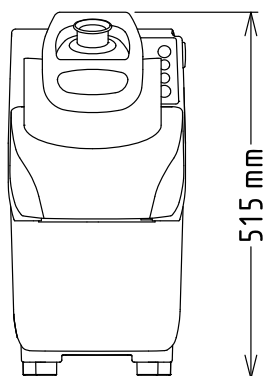


Side

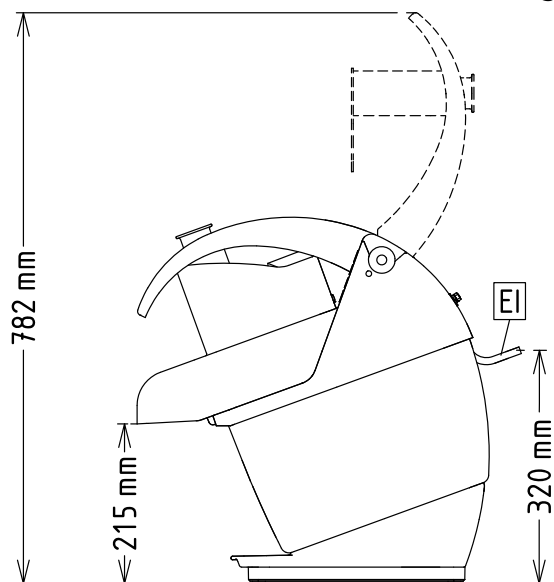

EI = Electrical inlet
(power)

Top

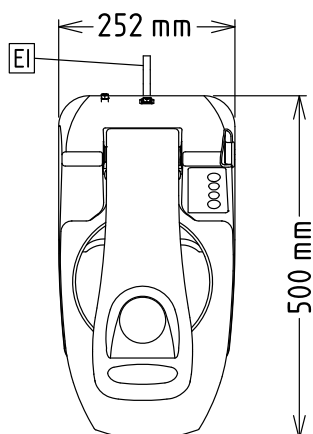

Electric

Supply voltage:

600424 (DTRSYYV) 200-240 V/1N ph/50/60 Hz

Electrical power max.:

0.5 kW

Total Watts:

0.5 kW

Capacity:

Performance (up to):

550 kg/hour

Key Information:

External dimensions,

Width:

252 mm

External dimensions,

Depth:

500 mm

External dimensions,

Height:

515 mm

Shipping weight:

22 kg