

Blast Chiller Freezers Crosswise
Blast Chiller-Freezer Crosswise 5
1/1 - 25kg (R452A) undercounter

ITEM # _____

MODEL # _____

NAME # _____

SIS # _____

AIA # _____

**110985 (ZCBCFA025UE)**

Blast chiller & freezer
crosswise 25kg, undercounter,
compatible with 6x1/1GN
convection oven crosswise -
R452A

Short Form Specification**Item No.** _____

Blast chiller/freezer with digital temperature and time display. For 5 GN 1/1 or 600x400 mm trays (h = 65 mm). Load capacity: chilling 25 kg; freezing 15 kg. Automatic detection of food probe insertion. Automatic and Manual defrost. Blast chilling real remaining time estimation (A.R.T.E.). Turbo cooling function. Thawing function. HACCP and Service alarms with data logging. Connectivity ready. Operating air temperature: +10/-36°C. Single sensor food probe. Main components in 304 AISI stainless steel. Suitable for undercounter installation. Internal rounded corners and drain. Evaporator with antirust protection. Performances guaranteed at ambient temperature of +40°C. Cyclopentane insulation (HCFC, CFC and HFC free). R452a refrigerant gas (HCFC and CFC free). Built-in refrigeration unit.

Main Features

- Blast Chilling cycle: 25 kg from 90°C up to 3°C in less than 90 minutes.
- Chilling cycle with automatic preset cycles:
 - Soft Chilling (air temperature 0°C), ideal for delicate food and small portions.
 - Hard Chilling (air temperature -12°C), ideal for solid food and whole pieces.
- Freezing cycle with automatic preset cycles (air temperature -36°C), ideal for all kind of food (raw, half or fully cooked).
- Turbo cooling: chiller works continuously at the desired temperature; ideal for continuous production.
- Thawing cycle (air temperature 7°C), ideal for defrosting food in a controlled and safe environment.
- Possibility to modify the cavity temperature in turbo cooling and thawing cycles.
- Remaining time estimation for probe-driven cycles based on artificial intelligence techniques (ARTE) for an easier planning of the activities.
- Single sensor core probe as standard.
- Control unit provides two large displays to read out: time, core temperature, cycle countdown, alarms, service information.
- On-board HACCP monitoring capable.
- Connectivity ready for real time access to connected appliances from remote and HACCP monitoring (requires optional accessory).
- Performance guaranteed at ambient temperatures of +40°C (Climatic class 5).
- Automatic and manual defrosting.
- Working temperature from +90°C to +3°C in chilling mode or to -36°C in freezing mode.

Construction

- No water connections required.
- Ventilator swinging hinged panel for access to the evaporator for cleaning.
- Waste water can be plumbed into drain, but can also be collected in an optional waste container.
- Environmentally friendly: R452a as refrigerant gas.
- Built-in refrigeration unit.
- Removable magnetic door gasket with hygienic design.
- 5 levels available. Usable with 5 GN 1/1 or 600x400 mm trays (h = 65 mm).
- Main components in 304 AISI stainless steel.
- Evaporator with antirust protection.
- Hygienic shape with rounded corners (and drain for easy cleaning).
- Automatic heated door frame.
- Door reversible on site.
- Door stopper to keep the door open in order to avoid the formation of bad smells (kit available to be mounted on site, depending on preferred door hinge).
- IP21 protection index.

Sustainability

- Holding at +3 °C for chilling or -20 °C for freezing, automatically activated at the end of each cycle, to save energy and maintain the target temperature (manual

APPROVAL: _____



Blast Chiller Freezers Crosswise Blast Chiller-Freezer Crosswise 5 1/1 - 25kg (R452A) undercounter

activation is also possible).

- High density polyurethane insulation, 60 mm thickness, HCFC free.

Included Accessories

- 1 of 1 single-sensor probe for blast chiller/ PNC 880213
freezers

Optional Accessories

- | | | |
|---|------------|--------------------------|
| • 1 single-sensor probe for blast chiller/ freezers | PNC 880213 | ☐ |
| • Kit 4 feet for blast chiller/freezers crosswise 15-25 kg - h100mm | PNC 881295 | ☐ |
| • Kit 4 wheels for blast chiller/freezers crosswise 15-25 kg - h100mm | PNC 881296 | ☐ |
| • Pair of AISI 304 stainless steel grids, GN 1/1 | PNC 921101 | ☐ |
| • Pair of AISI 304 stainless steel grids, GN 1/1 | PNC 922017 | ☐ |
| • AISI 304 stainless steel grid, GN 1/1 | PNC 922062 | ☐ |
| • AISI 304 stainless steel bakery/pastry grid 400x600mm | PNC 922264 | ☐ |
| • IoT module for blast chiller/freezers crosswise | PNC 922419 | ☐ |



**Blast Chiller Freezers Crosswise
Blast Chiller-Freezer Crosswise 5 1/1 - 25kg (R452A) undercounter**


The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.

2024.03.25


Blast Chiller Freezers Crosswise

Blast Chiller-Freezer Crosswise 5 1/1 - 25kg (R452A) undercounter

Front

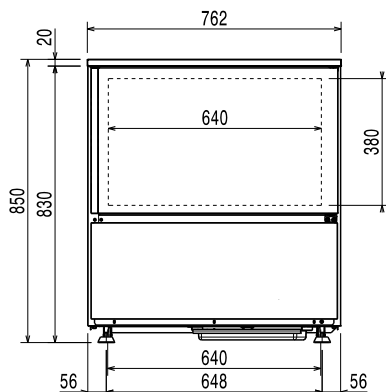


Side

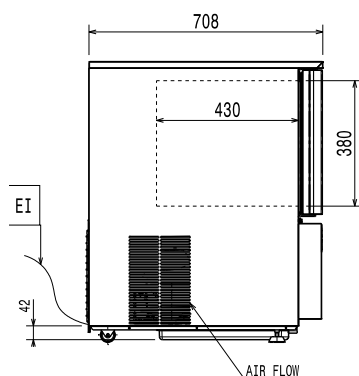

EI = Electrical inlet (power)

Top

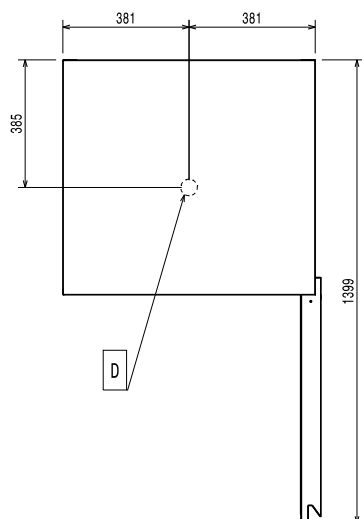

Electric

Supply voltage:

110985 (ZCBCFA025UE)

220-240 V/1 ph/50 Hz

Electrical power max.:

1.6 kW

Circuit breaker required

Installation:

Clearance:

5 cm on sides and back.

Please see and follow detailed installation instructions provided with the unit

Capacity:

Trays type:

GN 1/1;600x400

Key Information:

Door hinges:

Right Side

External dimensions, Width:

762 mm

External dimensions, Depth:

708 mm

External dimensions, Height:

850 mm

Net weight:

105 kg

Shipping weight:

97 kg

Shipping volume:

0.69 m³

Refrigeration Data

Control type:

Electronic

Refrigeration power at evaporation temperature:

-20 °C

Product Information (EN17032 – Commission Regulation EU 2015/1095)

Chilling Cycle Time (+65°C to +10°C):

100 min

Full load capacity (chilling):

25 kg

Freezing Cycle Time (+65°C to -18°C):

261 min

Full load capacity (freezing):

15 kg

Sustainability

Refrigerant type:

R452A

GWP Index:

2141

Refrigeration power:

2120 W

Refrigerant weight:

850 g

Energy consumption, cycle (chilling):

0.1012 kWh/kg

Energy consumption, cycle (freezing):

0.3453 kWh/kg