

NAU Maxi 2 Door Digital Stainless Steel Freezer, 1430lt (-22/-15)-R290

ITEM # _____

MODEL # _____

NAME # _____

SIS # _____

AIA # _____

**110964 (ZR4142FF)**2-door freezer 1430lt, -22/-15°
C, digital, stainless steel,
R290

Short Form Specification

Item No. _____

Two door freezer with internal and external structure in 430 AISI stainless steel; external back and bottom panels in anti-corrosive material. Large digital display featuring cabinet temperature display and setting, manual activation of defrost cycle and turbo frost cycle (to rapidly cool warm loads). HACCP-compliant control with alarms and history. Automatic defrost activates only when required with automatic evaporation of defrost water. Three probes to constantly monitor the working conditions of the appliance. Back to front forced air flow and removable air conveyors provides even temperature distribution and fast cooling in any conditions. Fitted with 75 mm-thick cyclopentane insulating foam. On-site reversible door features lock and door microswitch to switch off the fan when the door is opened. Hidden evaporator to guarantee higher storage capacity and less corrosion problems. Built-in refrigeration unit; ventilated operation. Operating temperature: -22/-15 °C. CFC and HCFC free. R290 gas in refrigeration circuit. Integrated RS485 port to facilitate connection to a remote computer and integrated HACCP systems.

Main Features

- Connectivity ready for real time access to connected appliances from remote and data monitoring (requires optional accessory).
- Easy serviceability thanks to the intuitive control panel with access via app.
- Integrated RS485 port to facilitate connection to a remote computer and integrated HACCP systems.
- Automatic defrost.
- Large storage area suitable to contain 2/1 GN grids or shelves on anti-tilt runners.
- Two full doors.
- This appliance is intended for use in ambient temperatures up to 40°C.
- Freezer model has operating temperatures that can be adjusted from -22 to -15 °C.
- Cabinet fitted with up to 75 mm thickness of cyclopentane insulation for best insulating performance with 100% environmental protection (thermal conductivity: 0,020 W/m*K).
- Hidden evaporator thus guaranteeing higher storage capacity and less corrosion problems.
- Internal structure with numerous charging positions available to host grids, ensuring higher net capacity and a greater storage space.
- 60 mm-thick insulation covering the evaporator can be easily removed with a single operation.
- Rilsan coated grids for improved protection.
- Optimized back to front forced air flow provide even temperature distribution and fast cooling in any conditions.
- Digital control with cabinet temperature display and setting and manual activation of defrost cycle. Fully compliant HACCP digital controls include visible alarms.

Construction

- AISI 430 stainless steel internal structure and external panels.
- External back panel in galvanized steel.
- Interior base with rounded corners, pressed from a single sheet.
- Lockable door.
- Mounted on adjustable Stainless steel feet, with castors as an option.
- The rounded internal corners, the easily removable runners and grids allow for ease of cleaning and high hygiene standards.
- Easy access to the main components for maintenance.
- Stainless steel runners and supports easily disassembled.
- Anti-corrosion bottom avoids any damage that may be caused to the cabinet by aggressive detergents employed to clean the floors.

APPROVAL: _____

- Doors are self-closing and can be fully opened up to 180°.

Included Accessories

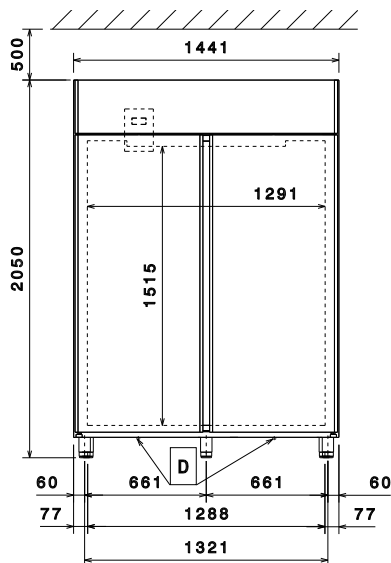
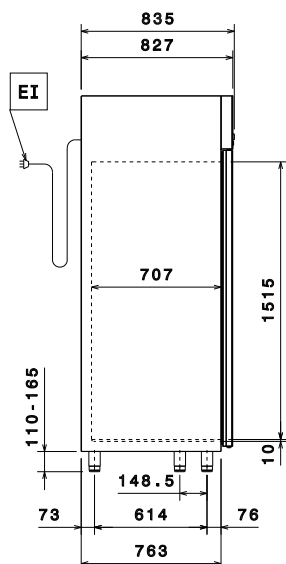
- 6 of 2/1GN grey rilsan grid with 2 runners PNC 881020

Optional Accessories

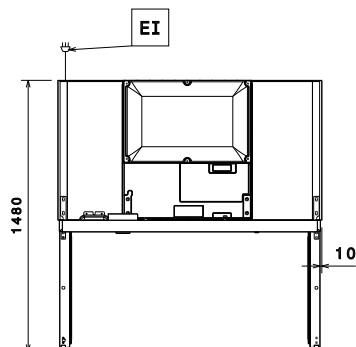
- | | | |
|--|------------|--------------------------|
| • 2 stainless steel runners for refrigerated cabinets (Marine) | PNC 880242 | ☐ |
| • Set of 8 GN1/1 PVC containers for fish | PNC 880243 | ☐ |
| • Spacer for 670 lt and 1430 lt refrigerated cabinets | PNC 880248 | ☐ |
| • Kit to fit 20 pastry trays (400x600mm) | PNC 880333 | ☐ |
| • Kit of 6 swivelling wheels, 2 with brake, diam 50 mm | PNC 880340 | ☐ |
| • Kit remote alarm | PNC 880570 | ☐ |
| • Ethernet connectivity kit IJF for Refrigeration | PNC 880685 | ☐ |
| • 1/1GN plastic container with false bottom | PNC 880705 | ☐ |
| • 2/1GN grey rilsan grid | PNC 881004 | ☐ |
| • 2/1GN aisi 304 stainless steel grid | PNC 881016 | ☐ |
| • 2/1GN 304 AISI stainless steel grid with 2 runners | PNC 881018 | ☐ |
| • 2/1GN grey rilsan grid with 2 runners | PNC 881020 | ☐ |
| • Set of 2 stainless steel runners for 670/1430lt refrigerators and freezers | PNC 881021 | ☐ |
| • Pedal opening for 1430lt refrigerator | PNC 881033 | ☐ |
| • 2/1GN pvc container with lid and 2 runners | PNC 881039 | ☐ |
| • 2/1GN perforated shelf | PNC 881042 | ☐ |
| • 1/1GN rilsan steel wire basket h=150mm | PNC 881043 | ☐ |
| • 3 grey rilsan central grids for 1430lt (not for glass door) | PNC 881044 | ☐ |
| • 2/1GN grey rilsan basket+2 runners h=150mm | PNC 881047 | ☐ |
| • 5 swivelling wheels (2 with brake), diam 125mm, for 1430 lt refrigerators, NOT for remote models | PNC 881294 | ☐ |
| • IOT module for refrigerated cabinets and counters | PNC 881298 | ☐ |
| • POE switch | PNC 922432 | ☐ |

NAU Maxi

2 Door Digital Stainless Steel Freezer, 1430lt (-22/-15)-R290

Front

Side


EI = Electrical inlet (power)

Top


Electric

Supply voltage:	220-240 V/1 ph/50 Hz
Electrical power max.:	0.8 kW

Key Information:

Gross capacity:	1430 lt
Capacity:	1430 lt / Bottle .75L Bordeaux
Door hinges:	1 Left+1 Right
External dimensions, Width:	1441 mm
External dimensions, Depth:	835 mm
External dimensions, Depth with Doors Open:	1480 mm
External dimensions, Height:	2050 mm
Number and type of doors:	2 Full
Number and type of grids (included):	6 - GN 2/1
Type of external material:	Stainless Steel
Type of internal material:	Stainless Steel
Internal panels material:	Stainless Steel
Number of positions & pitch:	44; 30 mm

Refrigeration Data

Control type:	Digital
Refrigeration power at evaporation temperature:	-30 °C
Operating temperature min.:	-22 °C
Operating temperature max.:	-15 °C
Operating mode:	Ventilated

Product Information (EU Regulation 2015/1094)

Type of model (EU Reg. 2015/1094):	vertical frozen
------------------------------------	-----------------

Sustainability

Energy Class (EU Reg. 2015/1094):	D
Yearly and daily energy consumption (EU Reg. 2015/1094):	4314kWh/year - 12kWh/24h
Climate class (EU Reg. 2015/1094):	Heavy Duty (5)
Energy Efficiency Index-EEI (EU Reg. 2015/1094):	61,06
Refrigerant type:	R290
GWP Index:	3
Refrigeration power:	751 W
Refrigerant weight:	145 g

EU energy labelling from 1st July 2016

The European energy labelling scheme for professional refrigerators and freezers is based on requirements setting Minimum Energy Performance standards for commercial refrigeration cabinets sold within the EU. These requirements are designed to drive energy efficiency and environmentally friendly approach for professionals. The European energy labelling scheme will apply to all manufacturers and importers who sell and market products within the EU and it is mandatory across Europe. Important: all products which consume energy above the minimum level will not be able to be sold within the EU from 1 July 2016.

SI 2020 No. 1528.

Important: all products which consume energy above the minimum level will not be able to be sold within the EU from 1 July 2016.

