

Modular Cooking Range Line EVO700 2-Hot Plates Electric Boiling Top Range

ITEM # _____

MODEL # _____

NAME # _____

SIS # _____

AIA # _____

**372014 (Z7ECED2R00)**2-hot plate (2,6 kW each)
electric boiling top**372126 (Z7ECED2R0N)**2-hot plate (2,6 kW each)
electric boiling top

Short Form Specification

Item No. _____

To be installed on open base installations, bridging supports or cantilever systems. Two 2.6 kW cast-iron hot plates hermetically sealed to the one-piece top. Exterior panels in stainless steel with Scotch Brite finish. One piece pressed work top in 1.5 mm thick stainless steel. Right-angled side edges to allow flush-fitting junction between units.

Main Features

- Unit to be mounted on open base cupboards, bridging supports or cantilever systems.
- The two 2.6kW cast-iron plates are hermetically sealed to the one-piece top.
- The special design of the control knob system guarantees against water infiltration.
- IPx4 water protection.
- Suitable for countertop installation.

Construction

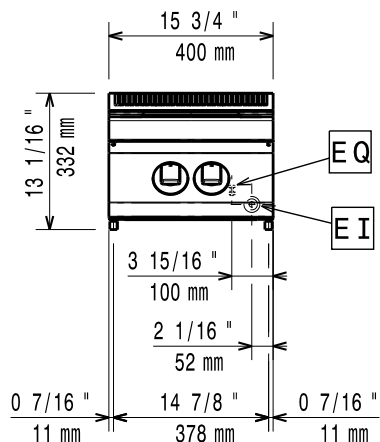
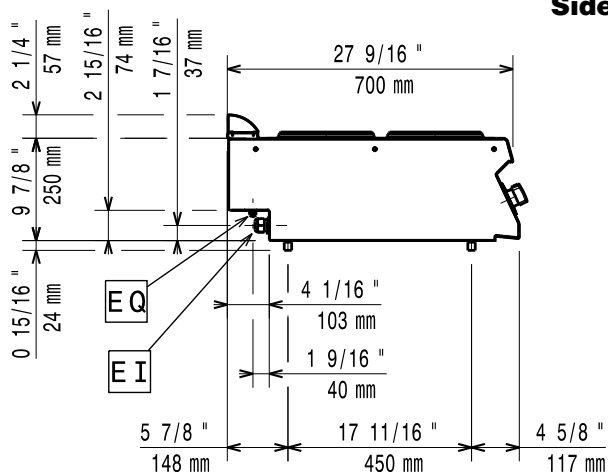
- One piece pressed 1.5 mm work top in Stainless steel.
- Model has right-angled side edges to allow flush fitting joints between units, eliminating gaps and possible dirt traps.
- External panel in Stainless Steel with Scotch Brite finish.

APPROVAL: _____

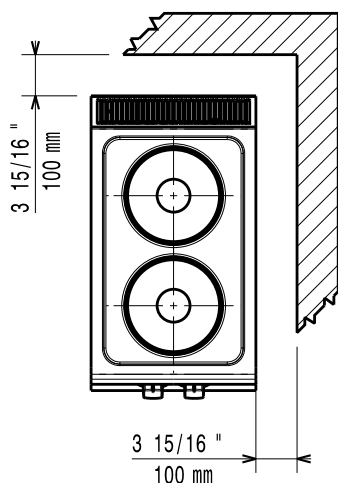
Optional Accessories

• Junction sealing kit	PNC 206086	☐
• Support for bridge type installation, 800 mm	PNC 206137	☐
• Support for bridge type installation, 1000 mm	PNC 206138	☐
• Support for bridge type installation, 1200 mm	PNC 206139	☐
• Support for bridge type installation, 1400 mm	PNC 206140	☐
• Support for bridge type installation, 1600 mm	PNC 206141	☐
• Support for bridge type installation, 400 mm	PNC 206154	☐
• Frontal handrail 400 mm	PNC 206166	☐
• Frontal handrail 800 mm	PNC 206167	☐
• Large handrail (portioning shelf) 400 mm	PNC 206185	☐
• Large handrail (portioning shelf) 800 mm	PNC 206186	☐
• Frontal handrail 1200 mm	PNC 206191	☐
• Frontal handrail 1600 mm	PNC 206192	☐
• Right and left side handrails	PNC 206240	☐
• Water column with swivel arm (water column extension not included)	PNC 206289	☐
• Water column extension	PNC 206291	☐
• Chimney upstand, 400 mm	PNC 206303	☐
• 2 side covering panels, height 250 mm, depth 700 mm	PNC 206320	☐
• Chimney grid net, 400mm	PNC 206400	☐

Modular Cooking Range Line EVO700 2-Hot Plates Electric Boiling Top Range

Front

Side


EI = Electrical inlet (power)
 EQ = Equipotential screw

Top


Electric

Supply voltage:

372014 (Z7ECED2R00)

380-400 V/3 ph/50/60 Hz

372126 (Z7ECED2R0N)

230 V/3 ph/50/60 Hz

Total Watts:

5.2 kW

Predisposed for:

372014 (Z7ECED2R00)

380-400V 3~ 50/60Hz
4,5-5,2kW

Key Information:

Front Plates Power:

2.6 - 0 kW

Back Plates Power:

2.6 - kW

Front Plates dimensions:

Ø 230

Back Plates dimensions:

Ø 230

Net weight:

ISO 9001; ISO 14001 kg

Shipping weight:

372014 (Z7ECED2R00)

24 kg

372126 (Z7ECED2R0N)

23 kg

Shipping height:

372014 (Z7ECED2R00)

530 mm

372126 (Z7ECED2R0N)

540 mm

Shipping width:

460 mm

Shipping depth:

820 mm

Shipping volume:

0.2 m³

If appliance is set up or next to or against temperature sensitive furniture or similar, a safety gap of approximately 150 mm should be maintained or some form of heat insulation fitted.

Certification group:

372014 (Z7ECED2R00)

EH72T

372126 (Z7ECED2R0N)

N7CE1