

Warewashing Utensil Dishwasher 1170 plates/h with Drain Pump and Pressure Boiler

ITEM # _____

MODEL # _____

NAME # _____

SIS # _____

AIA # _____



503020 (LU7PDP)

Short Form Specification

Item No. _____

Multi-purpose dish/utensil washer. Front loading with 450mm door opening. 304 AISI stainless steel top, front and side panels, wash tank, tank filter and wash and rinse arms. Wash tank (42lt) with rounded corners. Double skinned insulated walls and counterbalanced door with double stop. 3 programmable washing cycles. Self cleaning cycle. Digital control panel. Built-in pressure boiler with automatic boiler emptying function. Boiler with 304 welding for protection against corrosion. Drain pump. Non-return valve. Fault auto-diagnosis system. Rinse aid dispenser. Pre-arranged for external detergent dispenser, HACCP and Energy management device.

Hourly capacity: 1170 dishes/65 baskets 500x530mm.

Supplied with: n.1 basket for plates, n.1 wire basket for pizza plates, trays, and small utensils and n.2 cutlery containers.

Main Features

- Built-in pressure boiler sized to raise incoming 50 °C water to guarantee a minimum rinsing temperature of 82 °C for sanitizing rinse. No external booster is required.
- Double rack support equipped with either a large 550x535mm rack for pizza plates, trays and utensils or a standard 500x500mm rack for plates, cups and cutlery.
- Equipped with drain pump for easy and quick installation without opening the machine.
- Fault auto-diagnosis system.
- Simple service from the front.
- Easy to remove wash/rinse arms and filter.
- Fully automatic self-cleaning cycle avoids the risk of bacteria proliferation.
- Simple control panel, with digital display for wash and rinse temperature.
- Automatic boiler emptying function.
- 55/90/300 seconds cycles.
- Low noise level <65 dBA.

Construction

- Counter-balanced door to minimize impact when opening and closing.
- Unit to feature rinse aid dispenser pump.
- Unit to feature smooth surfaces to facilitate cleaning.
- Wash/rinse arms and nozzles in stainless steel.
- 304 AISI stainless steel front and side panels, wash tank and filter.
- Double skinned construction.
- Completely closed on the back by a cover plate.
- Double wash tank with rounded corners for easier cleaning operations.
- No pipes inside the washing chamber.

Sustainability

- Pre-arrangement for HACCP system implementation and Energy Management device.
- Finished in top quality materials to ensure durability.

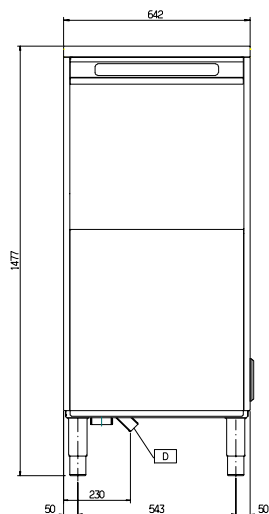
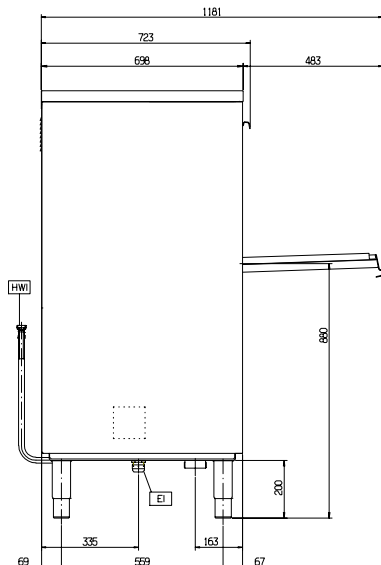
APPROVAL: _____

Included Accessories


- 2 of Yellow cutlery container PNC 864242
- 1 of Basket for 18 dinner plates or 27 side plates (max. diam. 240 mm) PNC 867002
- 1 of Wire basket with dividers for pizza plates, trays and little utensils PNC 867045

Optional Accessories

- External manual water softener - 12 lt PNC 860412 ☐
- External automatic water softener - 8 lt PNC 860413 ☐
- Filter for partial demineralization PNC 864017 ☐
- Kit to measure total/partial water hardness PNC 864050 ☐
- Rinse booster pump kit for single tank pressure dishwasher PNC 864051 ☐
- Detergent pump kit PNC 864218 ☐
- Yellow cutlery container PNC 864242 ☐
- Filter for total demineralization PNC 864367 ☐
- Connectivity kit for Undercounter, Utensil and Pot&Pan Washers (ECAP) PNC 864479 ☐
- Set of 4 yellow cutlery containers PNC 865574 ☐
- Basket for 12 soup plates or 12 cups (max. diam. 240 mm) PNC 867000 ☐
- Basket for 18 dinner plates or 27 side plates (max. diam. 240 mm) PNC 867002 ☐
- Cover grid for small/light items in rack PNC 867016 ☐
- Basket for 16 glasses max. height: 70 mm - blue PNC 867023 ☐
- Basket semi-professional (500x500x190mm) PNC 867024 ☐
- Wire basket with dividers for pizza plates, trays and little utensils PNC 867045 ☐
- Wire basket for utensils PNC 867046 ☐
- Ethernet Connector for ECAP protocol items PNC 922768 ☐

Front

Side


- D** = Drain
EI = Electrical inlet (power)
EO = Electrical Outlet
HWI = Hot water inlet
XR = Rinse aid connection

Top

Electric

Supply voltage:	
503020 (LU7PDP)	400 V/3N ph/50 Hz
Total Watts:	12.1 kW
Wash pump power:	0.8 kW

Water:

Washing tank capacity (lt):	42
Boiler Capacity (lt):	12
Washing cycle electrical elements:	3 kW
Hot rinse cycle duration (sec.):	16
Min hot rinse water consumption (lt/cycle)**:	3.8

Key Information:

Washing cycle temperature:	55-65 °C
Hot rinse cycle temperature:	80-90 °C
Working cycles time (sec.):	55/90/300
Cell dimensions - width:	554 mm
Cell dimensions - depth:	570 mm
Cell dimensions - height:	450 mm
External dimensions, Width:	642 mm
External dimensions, Depth:	723 mm
External dimensions, Height:	1477 mm
Net weight:	88 kg
Shipping weight:	100 kg
Shipping height:	1710 mm
Shipping width:	810 mm
Shipping depth:	760 mm
Shipping volume:	1.05 m³
Dishes capacity:	1170/hr
Basket capacity:	65/h

Sustainability

Water supply temperature*:	50 °C
----------------------------	-------