

Magistar Combi DS Electric Combi Oven 10GN2/1

ITEM # _____

MODEL # _____

NAME # _____

SIS # _____

AIA # _____



218823 (ZCOE102B2A0) Magistar Combi DS combi boiler oven with digital control, 10x2/1GN, electric, programmable, automatic cleaning

Short Form Specification

Item No.

Combi oven with digital interface with guided selection.

- Built-in steam generator with real humidity control based upon Lambda Sensor.
- AirFlow air distribution system to achieve maximum performance with 5 fan speed levels.
- HP Automatic Cleaning: Automatic and built-in self cleaning system with integrated descale of the steam generator. 5 automatic cycles (soft, medium, strong, extra strong, rinse-only).
- Cooking modes: Programs (a maximum of 100 recipes can be stored); Manual (steam, combi and convection cycles); EcoDelta cooking cycle; Regeneration cycle.
- Automatic backup mode to avoid downtime.
- USB port to download HACCP data, programs and settings. Connectivity ready.
- Single sensor core temperature probe.
- Double-glass door with LED lights.
- Stainless steel construction throughout.
- Supplied with n.1 tray rack 2/1 GN, 67 mm pitch.

Main Features

- Digital interface with LED backlight buttons with guided selection.
- Built-in steam generator for highly precise humidity and temperature control according to the chosen settings.
- Real humidity control based upon Lambda Sensor to automatically recognize quantity and size of food for consistent quality results.
- Dry, hot convection cycle (25 °C - 300 °C): ideal for low humidity cooking.
- Combination cycle (25 °C - 300 °C): combining convected heat and steam to obtain humidity controlled cooking environment, accelerating the cooking process and reducing weight loss.
- Low temperature Steam cycle (25 °C - 99 °C): ideal for sous-vide, re-thermalization and delicate cooking. Steam cycle (100 °C): seafood and vegetables. High temperature steam (25 °C - 130 °C).
- EcoDelta cooking: cooking with food probe maintaining preset temperature difference between the core of the food and the cooking chamber.
- Pre-set program for Regeneration, ideal for banqueting on plate or rethermalizing on tray.
- Programs mode: a maximum of 100 recipes can be stored in the oven's memory, to recreate the exact same recipe at any time. 4-step cooking programs also available.
- AirFlow air distribution system to achieve maximum performance in chilling/heating evenness and temperature control thanks to a special design of the chamber combined with high precision variable speed fan.
- Fan with 5 speed levels from 300 to 1500 RPM and reverse rotation for optimal evenness. Fan stops in less than 5 seconds when door is opened.
- Single sensor core temperature probe included.
- Automatic fast cool down and pre-heat function.
- HP Automatic Cleaning: Automatic and built-in self cleaning system with integrated descale of the steam generator. 5 automatic cycles (soft, medium, strong, extra strong, rinse-only).
- Grease Collector: predisposed for integrated grease drain and collection for safer operation (dedicated base as optional accessory).
- USB port to download HACCP data, share cooking programs and configurations. USB port also allows to plug-in sous-vide probe (optional accessory).
- Connectivity ready for real time access to connected appliances from remote and HACCP monitoring (requires optional accessory).
- Back-up mode with self-diagnosis is automatically activated if a failure occurs to avoid downtime.
- 2 different chemical options available: solid and liquid (requires optional accessory).
- Capacity: 10 GN 2/1 or 20 GN 1/1 trays.
- Connectivity ready for real time access to connected appliances from remote and data monitoring (requires optional accessory – contact the Company for more details).

APPROVAL: _____

- OptiFlow air distribution system to achieve maximum performance in chilling/heating evenness and temperature control thanks to a special design of the chamber.

Construction

- Double thermo-glazed door with open frame construction, for cool outside door panel. Swing hinged easy-release inner glass on door for easy cleaning.
- Seamless hygienic internal chamber with all rounded corners for easy cleaning.
- 304 AISI stainless steel construction throughout.
- Front access to control board for easy service.
- IPX 5 spray water protection certification for easy cleaning.
- Supplied with n.1 tray rack 2/1 GN, 67 mm pitch.

Sustainability

- Reduced power function for customized slow cooking cycles.


Optional Accessories

- | | | |
|---|------------|--------------------------|
| • External reverse osmosis filter for single tank Dishwashers with atmosphere boiler and Ovens | PNC 864388 | ☐ |
| • Water softener with cartridge and flow meter (high steam usage) | PNC 920003 | ☐ |
| • Water filter with cartridge and flow meter for 6 & 10 GN 1/1 ovens (low-medium steam usage - less than 2hrs per day full steam) | PNC 920004 | ☐ |
| • Water softener with salt for ovens with automatic regeneration of resin | PNC 921305 | ☐ |
| • Wheel kit for 6 & 10 GN 1/1 and 2/1 GN oven base (not for the disassembled one) | PNC 922003 | ☐ |
| • Pair of AISI 304 stainless steel grids, GN 1/1 | PNC 922017 | ☐ |
| • Pair of grids for whole chicken (8 per grid - 1,2kg each), GN 1/1 | PNC 922036 | ☐ |
| • AISI 304 stainless steel grid, GN 1/1 | PNC 922062 | ☐ |
| • AISI 304 stainless steel grid, GN 2/1 | PNC 922076 | ☐ |
| • External side spray unit (needs to be mounted outside and includes support to be mounted on the oven) | PNC 922171 | ☐ |
| • Pair of AISI 304 stainless steel grids, GN 2/1 | PNC 922175 | ☐ |
| • Baking tray for 5 baguettes in perforated aluminum with silicon coating, 400x600x38mm | PNC 922189 | ☐ |
| • Baking tray with 4 edges in perforated aluminum, 400x600x20mm | PNC 922190 | ☐ |
| • Baking tray with 4 edges in aluminum, 400x600x20mm | PNC 922191 | ☐ |
| • Pair of frying baskets | PNC 922239 | ☐ |
| • AISI 304 stainless steel bakery/pastry grid 400x600mm | PNC 922264 | ☐ |
| • Double-step door opening kit | PNC 922265 | ☐ |
| • Grid for whole chicken (8 per grid - 1,2kg each), GN 1/1 | PNC 922266 | ☐ |
| • Kit universal skewer rack and 6 short skewers for Lengthwise GN 2/1 and Crosswise ovens | PNC 922325 | ☐ |
| • Universal skewer rack | PNC 922326 | ☐ |
| • 6 short skewers | PNC 922328 | ☐ |
| • Multipurpose hook | PNC 922348 | ☐ |


- | | | |
|--|------------|--------------------------|
| • 4 flanged feet for 6 & 10 GN , 2", 100-130mm | PNC 922351 | ☐ |
| • Grease collection tray, GN 2/1, H=60 mm | PNC 922357 | ☐ |
| • Grid for whole duck (8 per grid - 1,8kg each), GN 1/1 | PNC 922362 | ☐ |
| • Thermal cover for 10 GN 2/1 oven and blast chiller freezer | PNC 922366 | ☐ |
| • Tray support for 6 & 10 GN 2/1 disassembled open base | PNC 922384 | ☐ |
| • Wall mounted detergent tank holder | PNC 922386 | ☐ |
| • USB single point probe | PNC 922390 | ☐ |
| • Tray rack with wheels, 10 GN 2/1, 65mm pitch | PNC 922603 | ☐ |
| • Tray rack with wheels 8 GN 2/1, 80mm pitch | PNC 922604 | ☐ |
| • Slide-in rack with handle for 6 & 10 GN 2/1 oven | PNC 922605 | ☐ |
| • Bakery/pastry tray rack with wheels 400x600mm for 10 GN 2/1 oven and blast chiller freezer, 80mm pitch (8 runners) | PNC 922609 | ☐ |
| • Open base with tray support for 6 & 10 GN 2/1 oven | PNC 922613 | ☐ |
| • Cupboard base with tray support for 6 & 10 GN 2/1 oven | PNC 922616 | ☐ |
| • External connection kit for liquid detergent and rinse aid | PNC 922618 | ☐ |
| • Stacking kit for 6 GN 2/1 oven placed on electric 10 GN 2/1 oven | PNC 922621 | ☐ |
| • Trolley for slide-in rack for 6 & 10 GN 2/1 oven and blast chiller freezer | PNC 922627 | ☐ |
| • Trolley for mobile rack for 6 GN 2/1 on 6 or 10 GN 2/1 ovens | PNC 922631 | ☐ |
| • Stainless steel drain kit for 6 & 10 GN oven, dia=50mm | PNC 922636 | ☐ |
| • Plastic drain kit for 6 & 10 GN oven, dia=50mm | PNC 922637 | ☐ |
| • Trolley with 2 tanks for grease collection | PNC 922638 | ☐ |
| • Grease collection kit for GN 1/1-2/1 open base (2 tanks, open/close device for drain) | PNC 922639 | ☐ |
| • Banquet rack with wheels holding 51 plates for 10 GN 2/1 oven and blast chiller freezer, 75mm pitch | PNC 922650 | ☐ |
| • Dehydration tray, GN 1/1, H=20mm | PNC 922651 | ☐ |
| • Flat dehydration tray, GN 1/1 | PNC 922652 | ☐ |
| • Open base for 6 & 10 GN 2/1 oven, disassembled - NO accessory can be fitted with the exception of 922384 | PNC 922654 | ☐ |
| • Heat shield for 10 GN 2/1 oven | PNC 922664 | ☐ |
| • Heat shield-stacked for ovens 6 GN 2/1 on 10 GN 2/1 | PNC 922667 | ☐ |
| • Kit to fix oven to the wall | PNC 922687 | ☐ |
| • 4 high adjustable feet for 6 & 10 GN ovens, 100-115MM | PNC 922688 | ☐ |
| • Tray support for 6 & 10 GN 2/1 oven base | PNC 922692 | ☐ |
| • Detergent tank holder for open base | PNC 922699 | ☐ |
| • Mesh grilling grid, GN 1/1 | PNC 922713 | ☐ |
| • Probe holder for liquids | PNC 922714 | ☐ |
| • Odour reduction hood with fan for 6 & 10 GN 2/1 electric ovens | PNC 922719 | ☐ |
| • Odour reduction hood with fan for 6+6 or 6+10 GN 2/1 electric ovens | PNC 922721 | ☐ |

- Condensation hood with fan for 6 & 10 GN 2/1 electric oven PNC 922724 ☐
- Condensation hood with fan for stacking 6+6 or 6+10 GN 2/1 electric ovens PNC 922726 ☐
- Exhaust hood with fan for 6 & 10 GN 2/1 GN ovens PNC 922729 ☐
- Exhaust hood with fan for stacking 6+6 or 6+10 GN 2/1 ovens PNC 922731 ☐
- Exhaust hood without fan for 6&10x2/1 GN oven PNC 922734 ☐
- Exhaust hood without fan for stacking 6+6 or 6+10 GN 2/1 ovens PNC 922736 ☐
- 4 high adjustable feet for 6 & 10 GN ovens, 230-290mm PNC 922745 ☐
- Tray for traditional static cooking, H=100mm PNC 922746 ☐
- Double-face griddle, one side ribbed and one side smooth, 400x600mm PNC 922747 ☐
- Trolley for grease collection kit PNC 922752 ☐
- Water inlet pressure reducer PNC 922773 ☐
- Kit for installation of electric power peak management system for 6 GN and 10 GN ovens PNC 922774 ☐
- Non-stick universal pan, GN 1/1, H=20mm PNC 925000 ☐
- Non-stick universal pan, GN 1/1, H=40mm PNC 925001 ☐
- Non-stick universal pan, GN 1/1, H=60mm PNC 925002 ☐
- Double-face griddle, one side ribbed and one side smooth, GN 1/1 PNC 925003 ☐
- Aluminum grill, GN 1/1 PNC 925004 ☐
- Frying pan for 8 eggs, pancakes, hamburgers, GN 1/1 PNC 925005 ☐
- Flat baking tray with 2 edges, GN 1/1 PNC 925006 ☐
- Potato baker for 28 potatoes, GN 1/1 PNC 925008 ☐
- Compatibility kit for installation on previous base GN 2/1 PNC 930218 ☐

Front

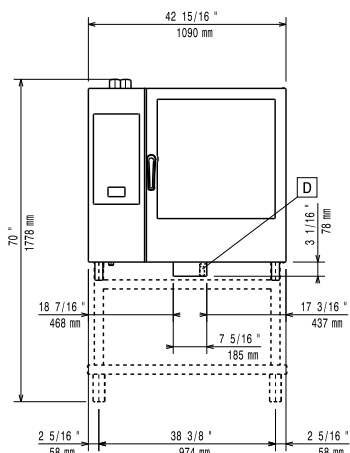


Side

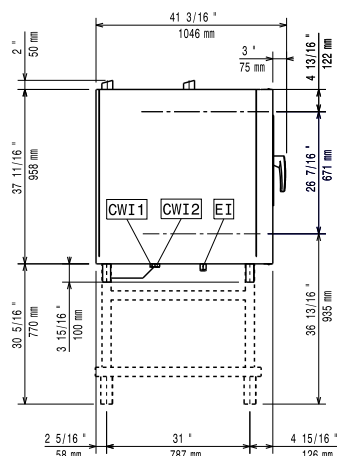

- C-** = Cold Water inlet 1 (cleaning)
WI-1
C- = Cold Water Inlet 2 (steam generator)
WI-2
D = Drain
DO = Overflow drain pipe
EI = Electrical inlet (power)

Top

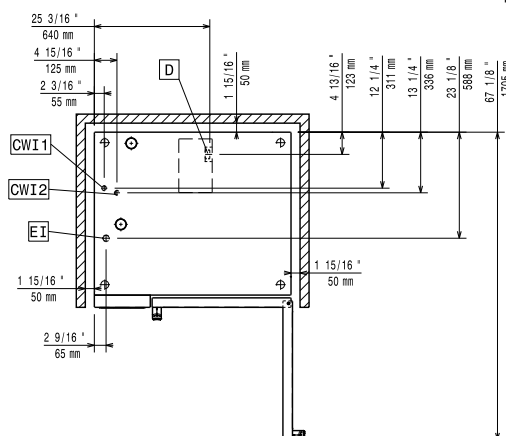

Electric

Supply voltage:

218823 (ZCOE102B2A0) 380-415 V/3N ph/50-60 Hz

Electrical power, default:

37.4 kW

Electrical power max.:

40.1 kW

Circuit breaker required

Water:

Water inlet connections

"CWI1-CWI2": 3/4"

Pressure, bar min/max: 1-6 bar

Drain "D": 50mm

Max inlet water supply temperature: 30 °C

Chlorides: <17 ppm

Conductivity: >50 µS/cm

Electrolux Professional recommends the use of treated water, based on testing of specific water conditions.

Please refer to user manual for detailed water quality information.

Installation:

Clearance:

Clearance: 5 cm rear and right hand sides.

Suggested clearance for service access:

50 cm left hand side.

Capacity:

Trays type:

10 - 2/1 Gastronorm

Max load capacity:

100 kg

Key Information:

Door hinges:

External dimensions, Width:

1090 mm

External dimensions, Depth:

971 mm

External dimensions, Height:

1058 mm

Net weight:

179 kg

Shipping weight:

204 kg

Shipping volume:

1.59 m³